

Vended Single Dryer



At Huebsch®, our priority is making commercial laundry equipment that's perfectly aligned with your business philosophy. In other words, because you believe that profit is the inevitable result of superior efficiency, durability, simplicity and service, that's exactly what we deliver.

FAST DRYING TIMES

Huebsch dryers offer a 7.0 cu. ft. cylinder with an 18 lb capacity offers ample space for large loads to tumble and product fast drying times, while lowering utility consumption.

LARGE, REVERSIBLE DOORS

Our dryers boast the industry's largest door opening at 2.06 sq. ft. Dryer doors also are reversible, making it easy to customize your laundry for your customers' convenience.


SOLID BASE

Huebsch dryers are built on sturdy steel bases to ensure years of worry-free performance.

UNMATCHED DURABILITY

Built with premium materials and tested to meet the demands of the harshest environments, these commercial-grade machines deliver reliable, efficient operation load after load—and they're backed up by Huebsch's standard three-year warranty.*

*Parts only, labor not included. See Huebsch Warranty Bond for specifics.

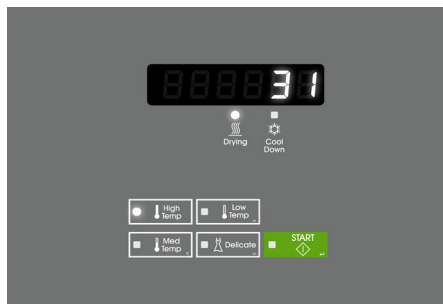

MICRO-DISPLAY CONTROL II

The Micro-Display Control II features a time-remaining countdown, coin countdown and cycle status lights.

- Capacitive Touch buttons are durable, inside and out, and reliable for years of use without looking worn
- White LED lights on buttons
- Integrated Wifi
- NFC allows programming using your phone/tablet, Android only

Vended **Single Dryer** specifications

Specifications		Front Control	Rear Control	
Control Options		MDC II	MDC II	Coin Slide
Models	Electric	HDEBCAGS176TW01	HDEBCRGS176TW01, HDEBYRGS176TW01	HDESXRG173TW01
	Gas	HDGBCAGS116TW01	HDGBCRGS116TW01, HDGBYRGS116TW01	HDGSXRG113TW01
Capacity - lb (kg)		18 (8.2)	18 (8.2)	
Cylinder Volume - cu. ft. (liters)		7.0 (198)	7.0 (198)	
Width - in (mm)		26.875 (683)	26.875 (683)	
Depth - in (mm)		28 (711)	28 (711)	
Height - in (mm)		44.375 (1126)	43 (1092)	
Motor Size - HP (kw)		0.33 (0.25)	0.33 (0.25)	
Available Heat Sources		Electric or Gas	Electric or Gas	
Available Heating Element (Electric W)		4750 @ 208V 5350 @ 240V	4750 @ 208V 5350 @ 240V	
Gas Inlet Connection - in (mm)		3/8 (9.5)	3/8 (9.5)	
Gas Consumption - BTU/Hr		25,000	25,000	
Exhaust Outlet Diameter - in (mm)		4 (102)	4 (102)	
Exhaust Airflow - cfm (liters/sec)		220 (105)	220 (105)	
Available Cycles*		High, Medium, Low, Delicates	High, Medium, Low, Delicates	
Cycle Indicator Lights		Yes	Yes	
Cylinder Finish		Galvanized	Galvanized	
Available Colors		White	White	
Door Type (Solid/Window)		Solid	Solid	
Available Electrical Requirements - (Voltage/Hz/Ph)		Electric: 208-240/60/1 - 30 Amp Gas: 100-120/60/1 - 15 Amp	Electric: 208-240/60/1 - 30 Amp Gas: 100-120/60/1 - 15 Amp	
Shipping Dimensions - in (mm)	Width	29 (737)	29 (737)	
	Depth	32.75 (832)	32.75 (832)	
	Height	45.5 (1156)	45.5 (1156)	
Net Weight - lb (kg)		Elec/Gas 150/155 (68/70)	Elec/Gas 135/140 (61/64)	
Shipping Weight - lb (kg)		Elec/Gas 160/165 (73/75)	Elec/Gas 145/150 (66/68)	
Available Agency Approvals		Elec: c ^{UL} US, Gas: c ^{CSA} US	Elec: c ^{UL} US, Gas: c ^{CSA} US	

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems are registered to ISO 9001.

©Copyright 2021 Alliance Laundry Systems LLC

* Information shown applies to highest end control available.

Note: Not all options are available for all models.
Twelfth digit in model number indicates US or Canadian unit. C=Canada & T=US.

Refer to the price list for the available models and options.

Front control unit is ADA Compliant.

Authorized Distributor



Pittsburgh Laundry Systems, LLC
412.351.4500
info@pittsburghlaundry.com
www.pittsburghlaundry.com